

Specifications

DESCRIPTION


- Brass construction
- Includes Red/Blue indicators

FLOW


- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- 9L-12L/min @ 3bar

CARTRIDGE

- Ceramic disk cartridge

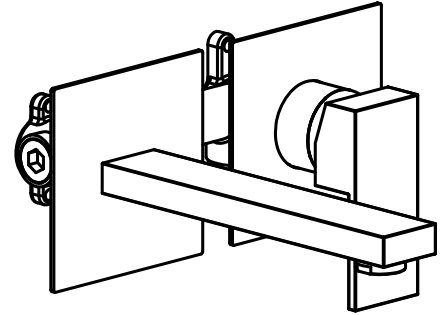


Wall Mounted Lavatory Tap

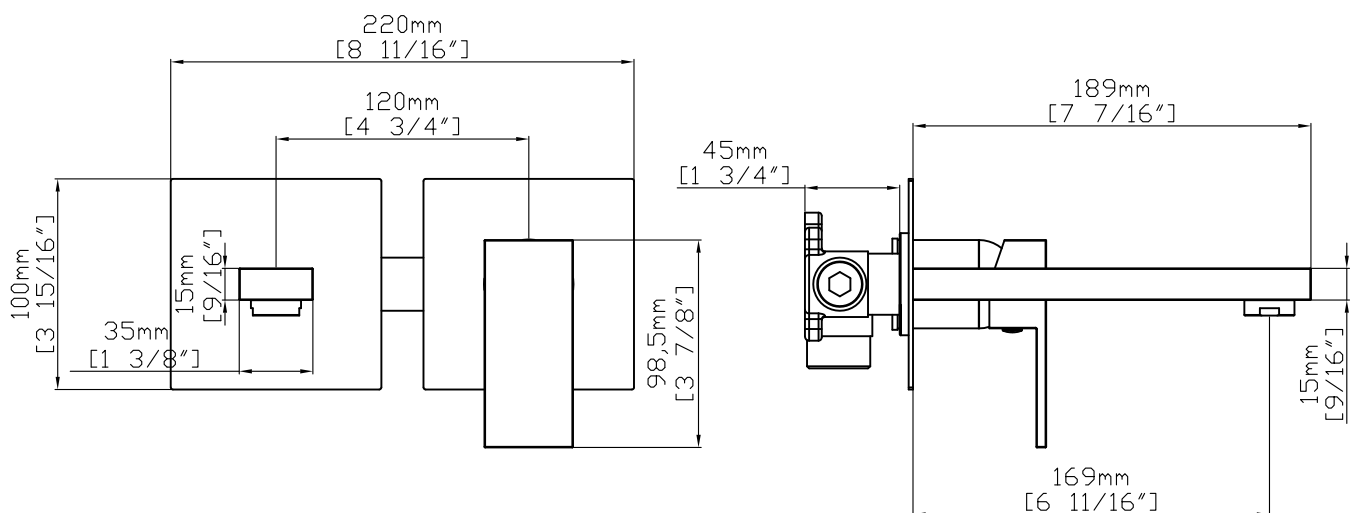


Note: Dimensions are for reference only. Detailed information is in accordance with the final product.

Wall Mounted Lavatory Tap Installation


INSTALLATION MANUAL Tools You Will Need :



Hexagon wrench



Philips Screwdriver




Pipe Tape

Notes before installation :


- 1.Please check that all components are present.
- 2.Before installation ensure that all feed lines are clear of debris and on/off valve is present.
- 3.Ensure water pressure is between 0.1-8 BAR (includes combination of hot and cold feed lines).
- 4.Pictures in the manual are general in content and may not represent exactly your purchased faucet.If you are having difficulties please contact a professional plumber.
- 5.If you will be away from home for an extended period you should shut off the main water supply.

Daily maintenance


- 1.Use a soft cloth and vinegar to remove hard-water spots.
- 2.Check aerator (if present) regularly for calcium build up are when water stream is not optimum.
- 3.DO NOT use caustic cleaning products as the use will break down finish and will void the product warranty.
- 4.Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
- 5.If the water pressure appears to be less than optimum remove,inspect, clean or replace aerator.

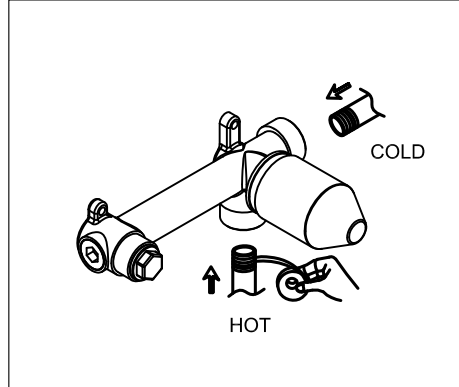


- 1.Use the pipe tape around the water pipe then connect to the hot and cold water pipe.

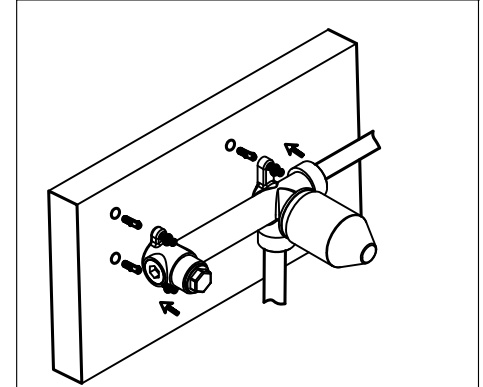


- 2.Fix the body of the basin faucet into the wall.

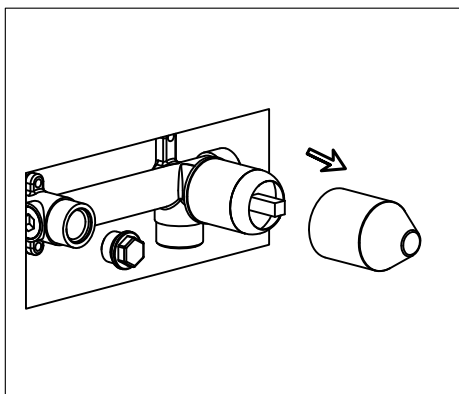


- 3.Remove the protection cover and plug.

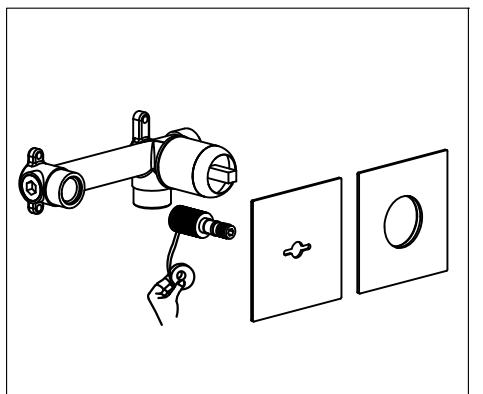

- 4.Wrap the thread of spout with teflon tape (ensure it must wrap clockwise).Screw-in to the inlet pipe inside the wall, then install the decorative cover on the wall clingy.

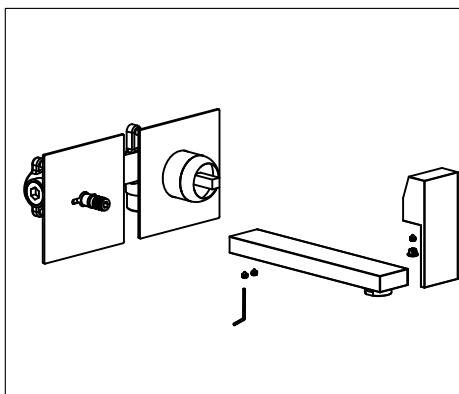

- 5.Used the hexagon wrench to install the handle and tight the spout.

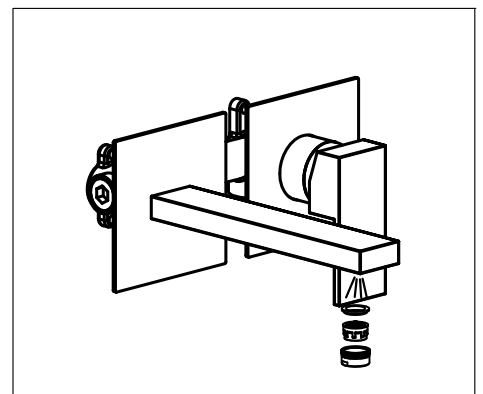

- 6.After install the faucet remove the aerator,turn on faucet handle for one minute to flush debris from faucet,close the handle and reassemble the aerator.