


Specifications

FLOW

- Showerhead is limited to 9L/min at 3Bar

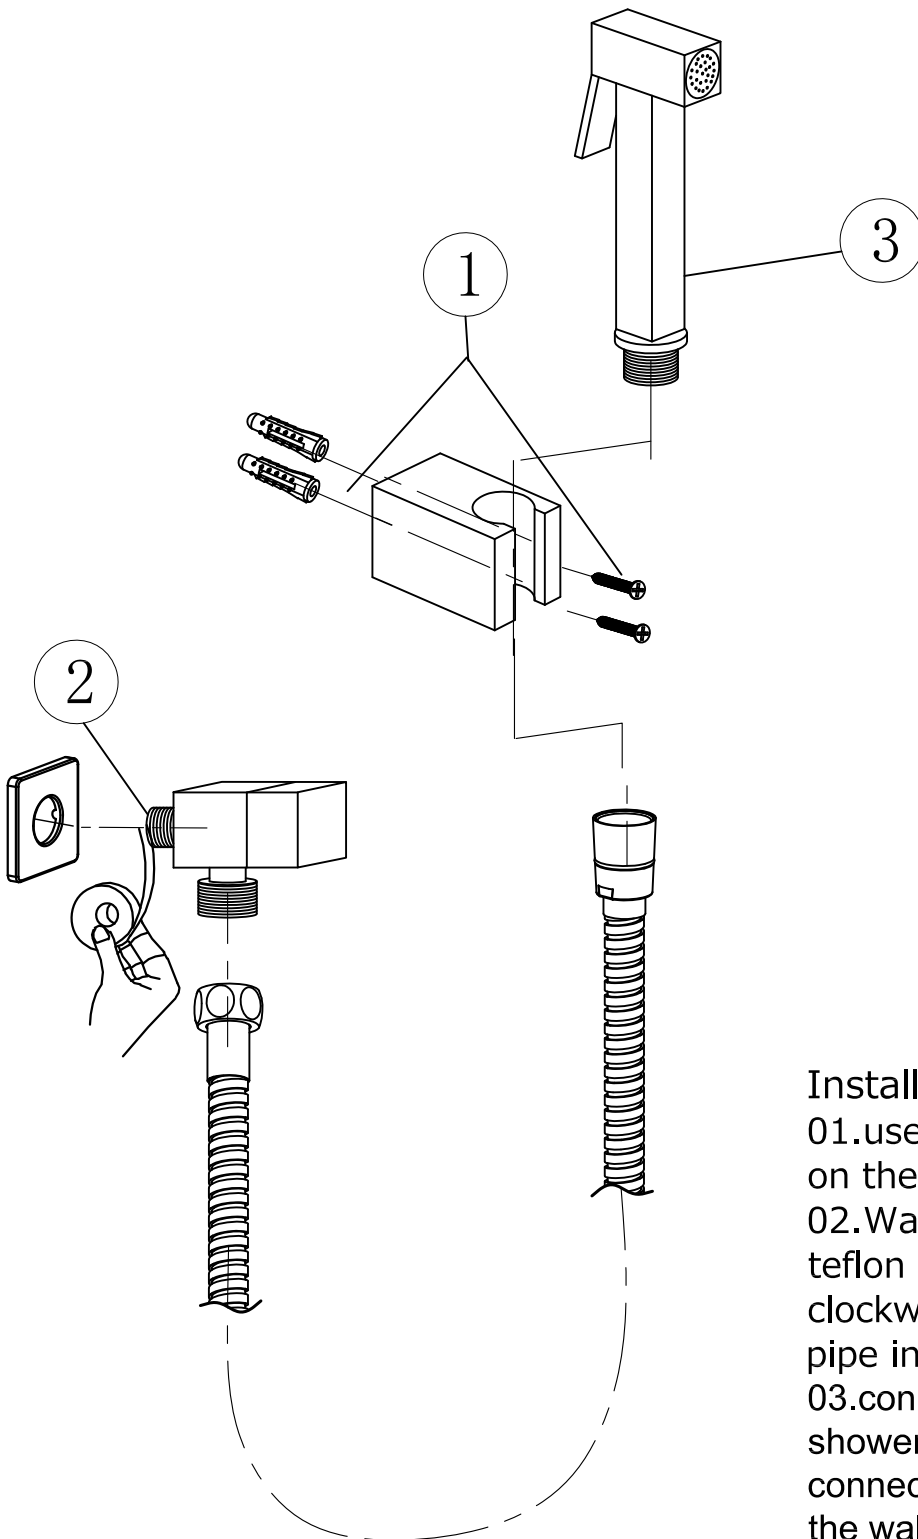

Installation:

01.use tapping screw to fix holder on the wall.

02.Warp the thread of spout with teflon tape (ensure it must warp clockwise).Screw-in to the inlet pipe inside the wall.

03.connect the hose with hand shower, the other outside Insert connector to the pipe which outside the wall.